

# AUTOMAC

Right on Point.

## High-speed Auto Door for Automation Projects



For VMC

Automac Smartauto Co., Ltd.  
[www.automac.com.tw](http://www.automac.com.tw)


# Specifications

	AD-4768	AD-6068	AD-6680
For VMC Y-axis stroke	400mm	400~600mm	600mm
Door Opening Width(mm)	470	600	660
Door Opening Height(mm)	680	680	800
Open/Close Speed	Max. 0.5M/s		
Sensor Type	Proximity Switch (Optional)		
Solenoid Valve	Neutral Position EMG Stop (Optional)		
Min. Pneumatic Pressure	0.4 Mpa		
Pipe Dia.	8mm		
Standard Accessories	ø8 Quick-connect Couplers X 2 ø8 Pneumatic Pipe X 3 meters		
Optional Accessories	Solenoid Valve Pipe Kit Proximity Switches On-site Installation		



## Features:

1. Quick installation
2. Slick outlook
3. Maintenance free
4. Automatic removal of chips
5. 0.5Mpa Air pressure as low as 0.5 Mpa meeting international norm.

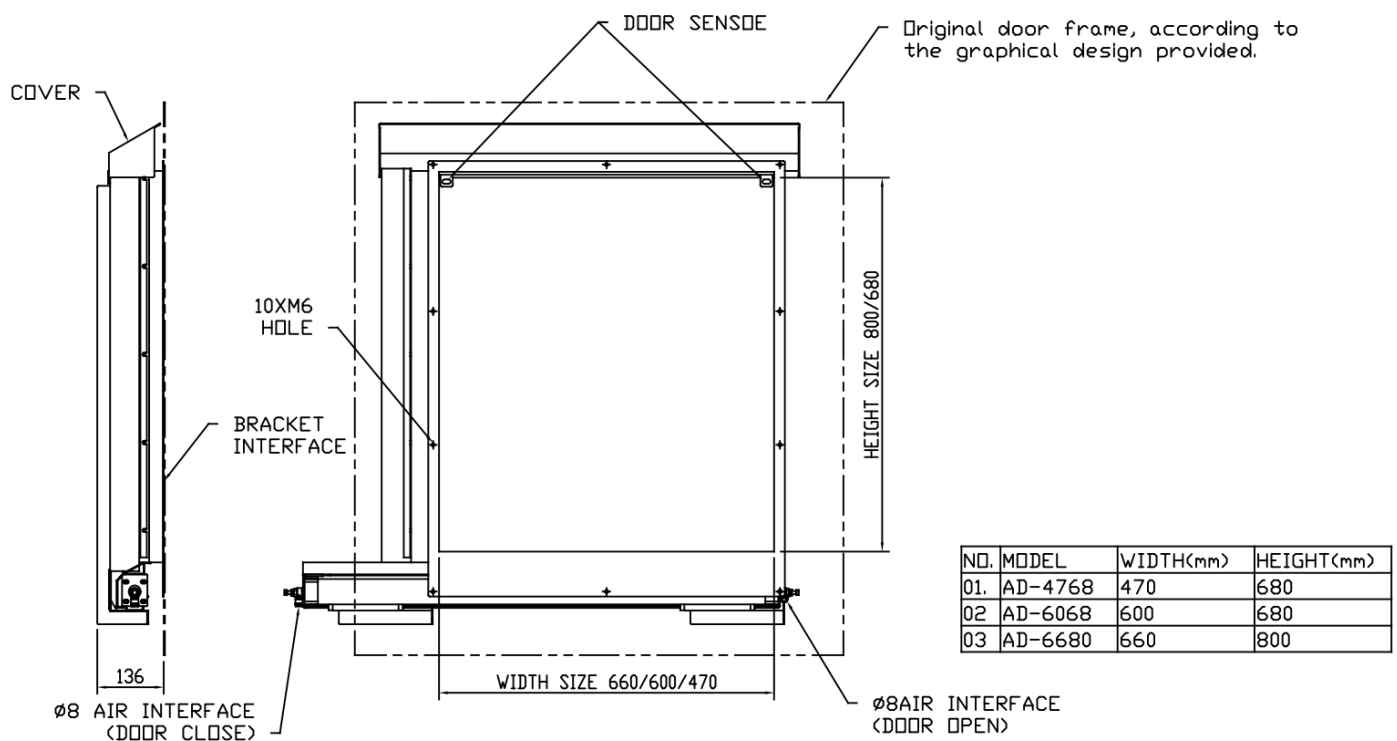

**AUTOMAC**  
Right on point

Best partner



**AUTOMAC SMARTAUTO CO., LTD**

NO.17 Zili 3rd Rd, Nanton Country 54067, Taiwan

886 49 2253 621 886 49 2252 721 82832642

sales@automac.com.tw www.automac.com.tw